

Maior P - P AB


CALDO

MODELS P10-P15-P25-P35 AB



The MAIOR range of oil burners has been designed for installation in modern boilers with high combustion chamber resistances. A fully automatic hydraulic damper is fitted to allow progressive air adjustment on the first and second stage. This system ensures correct combustion, even during the low-fire condition. The control box installed in the MAIOR burner range allows a pre-purge before every start cycle, controls safe starting and flame monitoring.

WORKING FIELDS

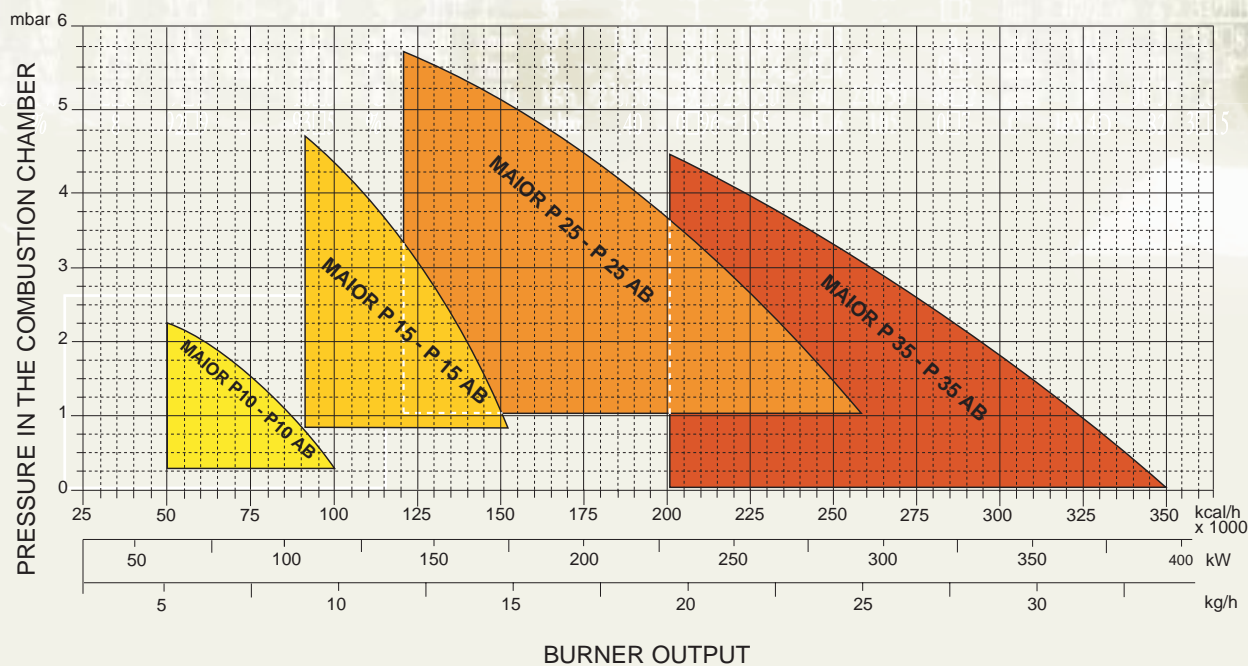

Ecoflamcaldo

MAIOR

		P 10 / P 10 AB	P 15 / P 15 AB	P 25 / P 25 AB	P 35 / P 35 AB
Output max.	kW	118	178	296	415
	kcal/h	100.000	150.000	250.000	350.000
Output min.	kW	59	107	142	237
	kcal/h	50.000	90.000	120.000	200.000
Max. flow rate	kg/h	10	15	25	35
Min. flow rate	kg/h	5	9	12	20
Power supply 50 Hz	V	230	230	230	230/400
Motor	W	130	200	250	370
Operation		1 flame / 2 flames	1 flame / 2 flames	1 flame / 2 flames	1 flame / 2 flames
Fuel: Light oil	kcal/kg	10.200 max. visc 1,5°E a 20°C			




OVERALL DIMENSIONS

	P 10 / P 10 AB	P 15 / P 15 AB	P 25 / P 25 AB	P 35 / P 35 AB
A	320	333	333	374
B	145	150	150	126
C	175	183	183	248
D	95	170	170	210
D1	150	270	270	387
E	205	298	298	355
F	89	108	133	160
G	195	270	270	270
H	153	185	185	-
I	110	-	-	190
L	110	-	-	190
M	M8	M8	M8	M8
O	205	-	-	-

D = Short head D1 = Long head

DIMENSIONS

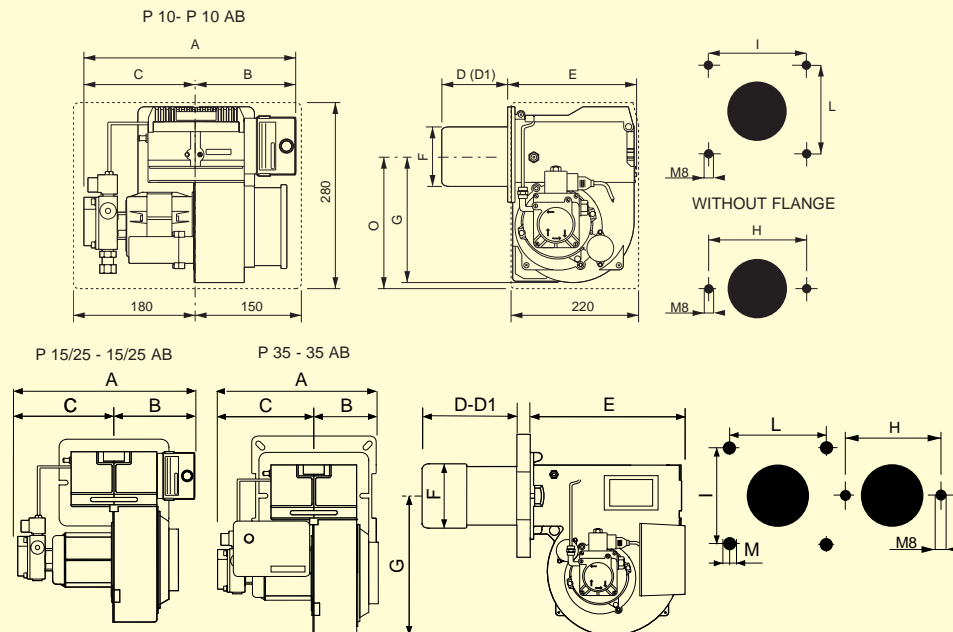

ECOFLAM S.P.A. RESERVES THE RIGHT TO MAKE ANY ADJUSTMENTS, WITHOUT PRIOR NOTICE, WHICH IT CONSIDER NECESSARY OR USEFUL TO ITS PRODUCTS, WITHOUT AFFECTING THEIR MAIN FEATURES .